


### **SPECIFICATION SHEET**

# **CP57E SERIES RANGE HOODS**



Specially designed to be installed in a custom hood and used over residential, commercial-style cooking surfaces.


A complete installation requires several optional components. Refer to page 2 when planning your installation.

#### **FEATURES**

- Cabinet mount custom applications
- Finish: 430 Stainless Steel #4 Brushed
- Widths: 34-3/8", 46-3/8", 58-3/8"
- Depth: 22-1/2"
- Backdraft damper
- 1-Level LED lighting (2 LED modules 34-3/8" & 46-3/8" widths, 4 LED modules - 58-3/8" width, 6 Watts Max. each) 3000K nominal
- Easily accessible, dishwasher safe stainless steel Hi-Flow™ baffle filters with handles
- 4-speed electronic blower control
- Delay timer control automatically shuts off range hood after 10 minutes
- Heat Sentry<sup>™</sup> automatically turns blower to high speed when excess cooking heat is detected
- Special control indicates when it's time to clean the filter
- Use with exterior-mounted or attic-installed remote blowers for different levels of exhaust capacity (see specifications)
- For indoor use only
- Remote control (optional) (ACR2)

#### **SPECIFICATIONS**

WITH OPTIONAL BLOWER MODELS		BLOWER CFM	VOLTS	AMPS	DUCT
EB6		600 max.			
EB9	wall or roof mount remote blowers	900 max.	120	1.0 max. (lights only) + 6.0 max. (blower only)	10-in. round at the hood  See blower specs for duct requirements.
EB12		1200 max			
EB15		1500 max.			
ILB3		280 max.			
ILB6	attic installed	600 max.			
ILB9	inline blowers	800 max.			
ILB11		1100 max.			

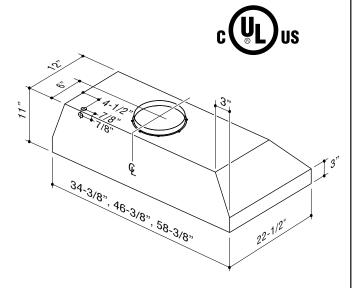


BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711
BEST Mississauga, Ontario www.BestRangeHoods.com 877-896-1119

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date


31L 99045200A

To minimize the gap around the power pack, take actual width and depth measurements of power pack and add 1/16" to get D and E measurements. Cut the hole in the bottom of the cabinet according to dimensions. See chart and illustration for details.

Power	R PACK	CUTOUT DIMENSIONS		
SERIES	WIDTH	D	E	
	36"	22%"	34½"	
CP57E	48"	22%"	461/2"	
	60"	22%"	58½"	



## **CP57E SERIES HOOD SYSTEM**

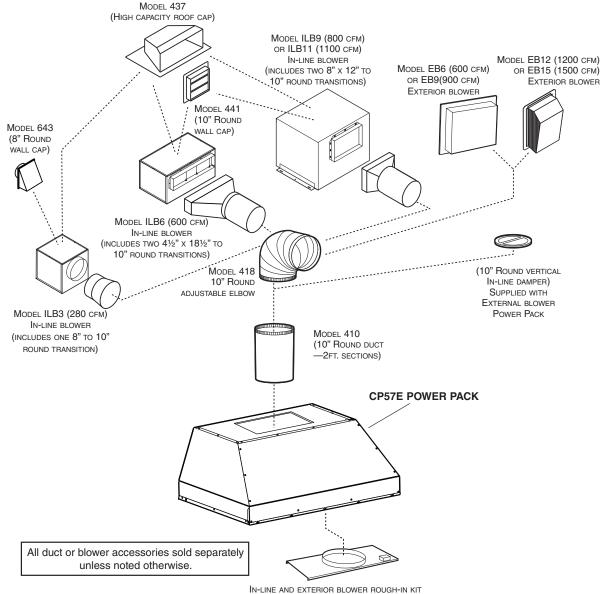



(INCLUDED WITH EB6, EB9, EB12, EB15, ILB3, ILB6, ILB9 AND ILB11 BLOWERS.)

BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711
BEST Mississauga, Ontario www.BestRangeHoods.com 877-896-1119