


P195 SERIES POWER PACK

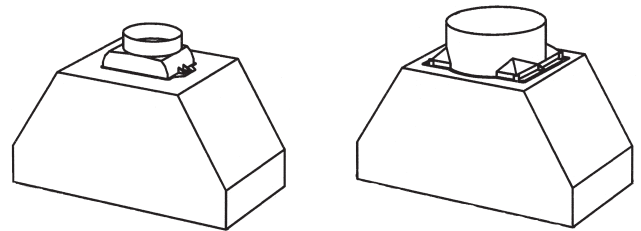

Best quality design and craftsmanship in a unit that mounts flush with the bottom of cabinets or in a custom hood.

FEATURES


- Italian design
- Cabinet mount – custom applications
- Finishes: 430 Stainless Steel, White, Black
- Widths: 52cm (20½"), 70cm (27-9/16") (P1952M 70cm only)
- 6" (400 cfm) or 8" (800 cfm) round duct connector/back-draft damper
- Convertible to recirculating mode with filter kit sold separately (Model P1951M only)
- Halogen lighting (2 bulbs included. Type GU10, MR16 shielded, 120 volt, 50 watts max.)
- Push button controls: lights, three speeds
- Centrifugal blower
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected
- For indoor use only

OPTIONS


- Recirculating filters (Model No. ROUNDFILTER)
- Stainless liner (Model Nos. L5230, L7030, L7036, L7048)
- Ambient light panel (Model Nos. ALP30, ALP36, ALP48)

SPECIFICATIONS

MODEL	VOLTS	AMPS	CFM	SONES	DUCT
P1951M	120	3.53	450	8.0	6" round
P1952M	120	6.23	800	10.0	8" round

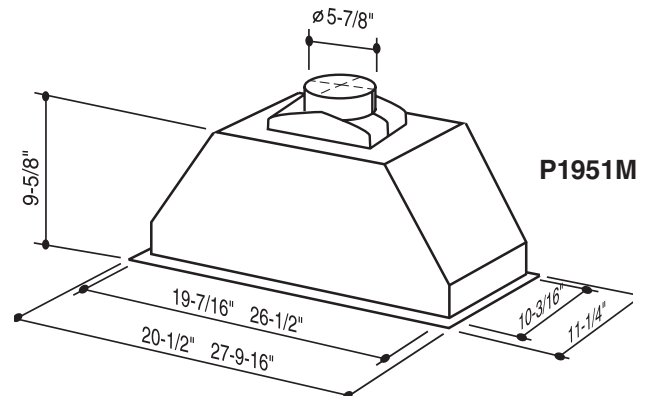

P1951M

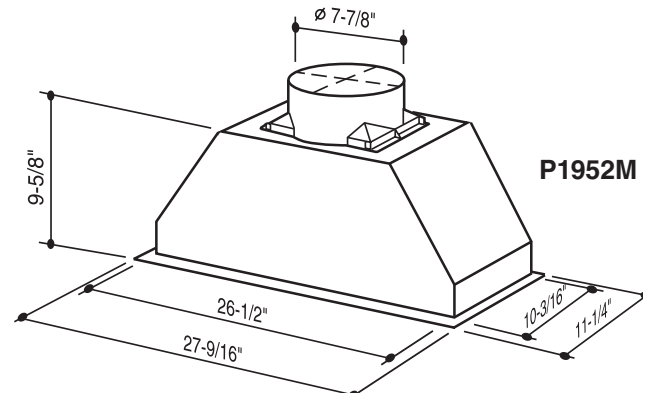

P1952M



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

Mount power pack so bottom is 24" to 30" over cooking surface.


Custom metal liner may be required – contact local building authority.

BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711
BEST Drummondville, QC, Canada www.BestRangeHoods.com 866-737-7770


REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

P195 SERIES WIRING


ONE
MOTOR

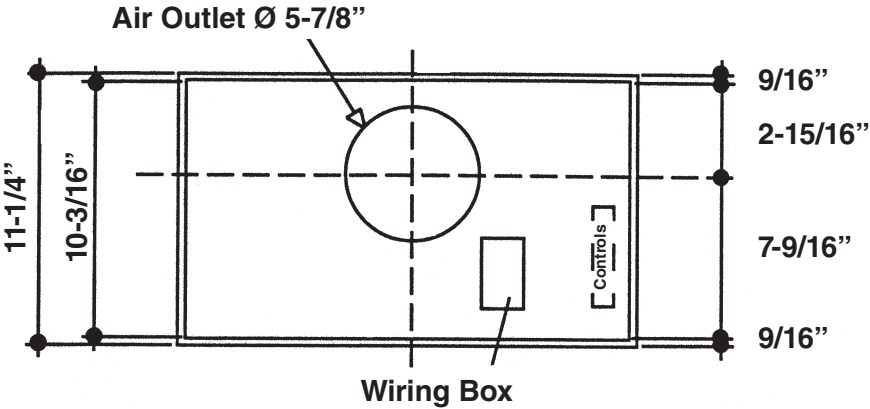

TWO
MOTORS

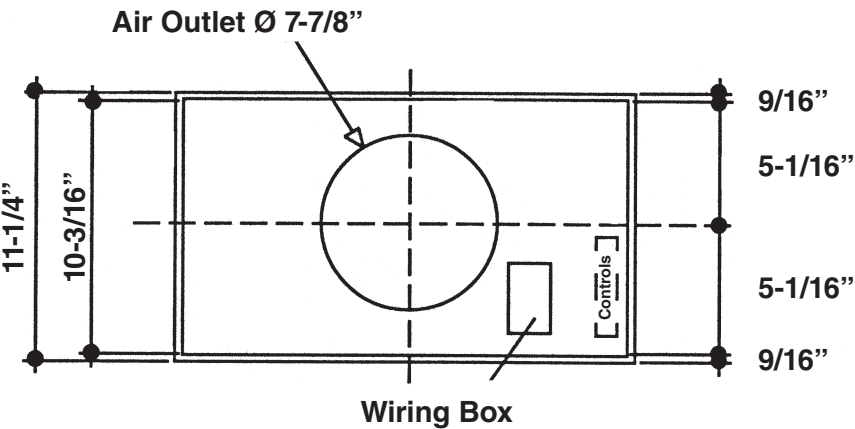

P195 SERIES MOUNTING

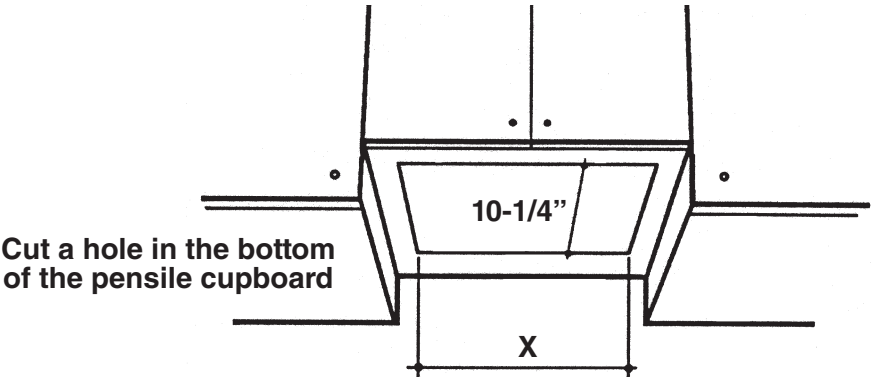

X = 19-1/2" for 52cm version
X = 26-5/8" for 70cm version