


DROP-IN COOKTOP PRODUCT DIMENSIONS


CDU-365 & CDU-304

CDU-365


Top View

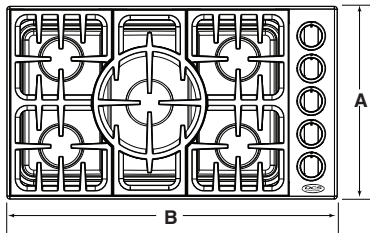

Front View




Right Side View




CDU-304


Top View



Front View



Right Side View




PRODUCT DIMENSIONS (INCHES)

	CDU-365	CDU-304
A Overall depth of product	21"	21"
B Overall width of product	36"	30"
C Width of product chassis	34 - 1/2"	28 - 5/16"
D Distance from right edge of chassis to center line of gas inlet	2 - 3/4"	2 - 11/16"
E Height of chassis	4"	4"
F Overall height of product (from bottom of chassis to top of grates)	5 - 1/2"	5 - 1/2"
G Distance from rear edge of chassis to center line of gas inlet	4 - 9/16"	1 - 1/2"
H Depth of product chassis	19 - 1/2"	19 - 1/2"

DROP-IN COOKTOP CUTOUT AND CABINETRY DIMENSIONS

CDU-365, CDU-304, CDU-365 & DD36

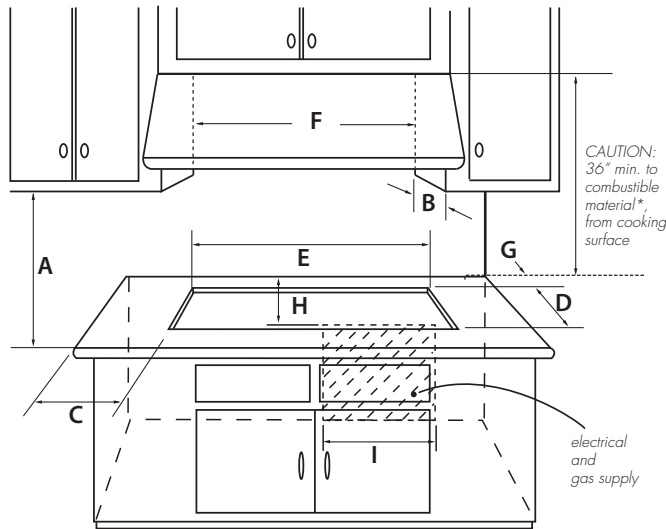


*As defined in the "National Fuel Gas Code" (ANSI Z223.1, latest edition).
NOTE: See manufacturer's recommendations for ducting specifications.

WHEN INSTALLING WITH A RANGEHOOD

	CDU-365	CDU-304
A Vertical distance from countertop to cabinet extending above counter	18" MIN	18" MIN
B Depth of overhead cabinetry	13" MAX	13" MAX
C Min. clearance from left edge of cutout to nearest vertical combustible surface	5 - $\frac{5}{8}$ "	5 - $\frac{1}{16}$ "
D Depth of cutout	19 - $\frac{3}{4}$ "	19 - $\frac{3}{4}$ "
E Width of cutout	34 - $\frac{3}{4}$ "	28 - $\frac{5}{8}$ "
F Minimum width of rangehood	36"	30"
G Minimum clearance from rear edge of cooktop cutout to back wall	2 - $\frac{1}{2}$ "	2 - $\frac{1}{2}$ "
H Minimum distance from countertop to top of electrical and gas supply area	5"	5"
I Width of electrical and gas supply area	18"	18"

WHEN INSTALLING WITH A DCS DD-36 VENTILATION SYSTEM

	CDU-365
A Vertical distance from countertop to cabinet extending above counter	18" MIN
B Depth of overhead cabinetry	13" MAX
C Min. clearance from left edge of cutout to nearest vertical combustible surface	5 - $\frac{5}{8}$ "
D Depth of cooktop cutout (excl downdraft recess)	19 - $\frac{3}{4}$ "
E Width of cooktop cutout	34 - $\frac{3}{4}$ "
G Minimum clearance from rear edge of vent cutout to back wall	$\frac{1}{2}$ " MIN
I Width of electrical and gas supply area	9"
J Minimum distance from countertop to top of electrical and gas supply area	26 - $\frac{1}{2}$ "
K Minimum distance between overhead cabinets installed to either side of product	36" MIN

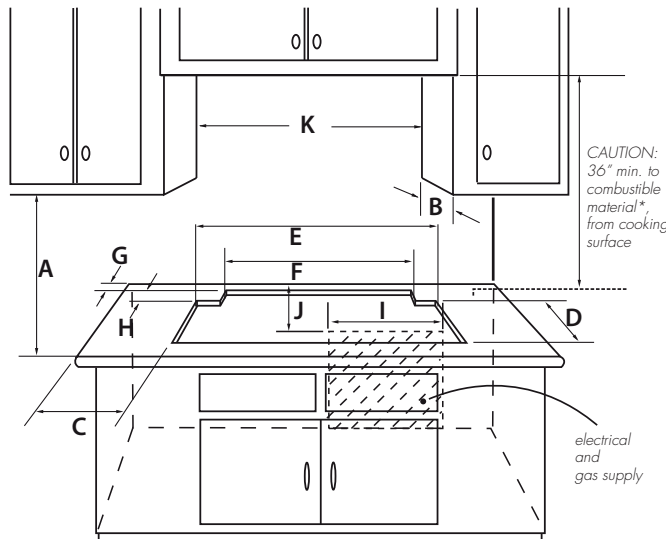

*As defined in the "National Fuel Gas Code" (ANSI Z223.1, latest edition).
The horizontal surfaces of the range top (cooktop) trim must not be below countertop level.
NOTE: See manufacturer's recommendations for ducting specifications.

	DD36
F Width of cutout recess for ventilation system	33 - $\frac{1}{2}$ "
H Depth of cutout recess for ventilation system	2 - $\frac{5}{8}$ "