

Miele

36" Pure Wall
Ventilation Hood

DA 6498 W



36" Pure Wall Ventilation Hood


SPECIFICATIONS	
Overall Unit Dimensions	35 ³ / ₈ " (898 mm) W x 21 ⁵ / ₈ " (550 mm) H x 20 ⁹ / ₁₆ " (522 mm) D
Fan	
Fan Speeds	4, Including Intensive setting
Maximum CFM	625 CFM (Reducing Collar is available to reduce air flow to less than 400 CFM)
Duct	
Recommended Duct Diameter	6" (150 mm)
Electrical	
Electrical Requirements	120V, 60Hz, 15A
Power Cord	Molded NEMA 5-15 plug, 2.5 ft (0.75 m)
Electrical Rating	356W
Shipping	
Shipping Weight	93 lbs (47 kg)
Shipping Dimensions	34 ⁷ / ₈ " W x 25" H x 41" D
Installation Accessories	
Charcoal filter	DKF 25-900
Chimney Extension	DADC 6000
Reducing Collar	R2000
Support	
Call Miele	(800) 999-1360
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com



DA 6498 W
Item 28649860USA

36" Pure Wall Ventilation Hood

INSTALLATION SPECIFICATIONS

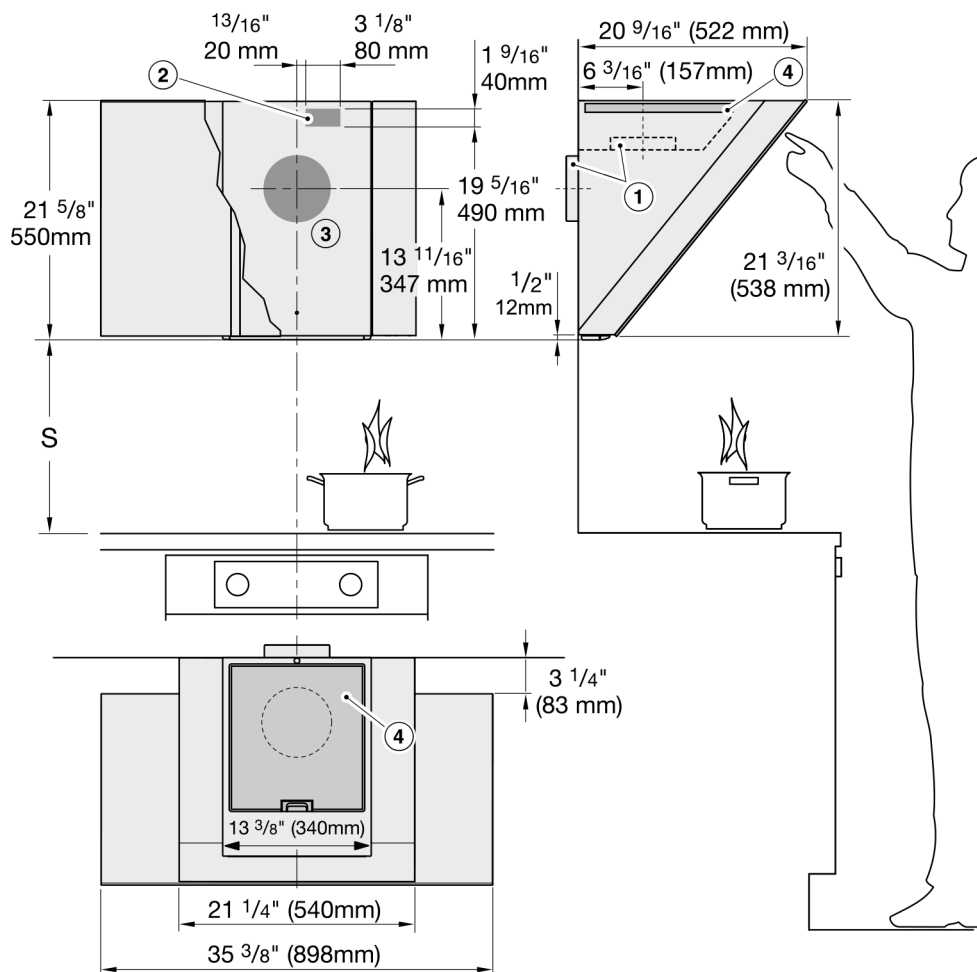


- ① Extraction ducting upward or to the rear.
- ② Cut-out for ventilation hoods with hard-wired connection rather than a plug.
- ③ 7 7/8" (200 mm) Ø cut-out ensures sufficient space through the wall for the extraction ducting to flex.
- ④ Air vent for recirculation mode. The distance to the ceiling or to furniture installed above the appliance should be at least 11 3/4" (300 mm).

36" Pure Wall Ventilation Hood

INSTALLATION SPECIFICATIONS

Mounting Details

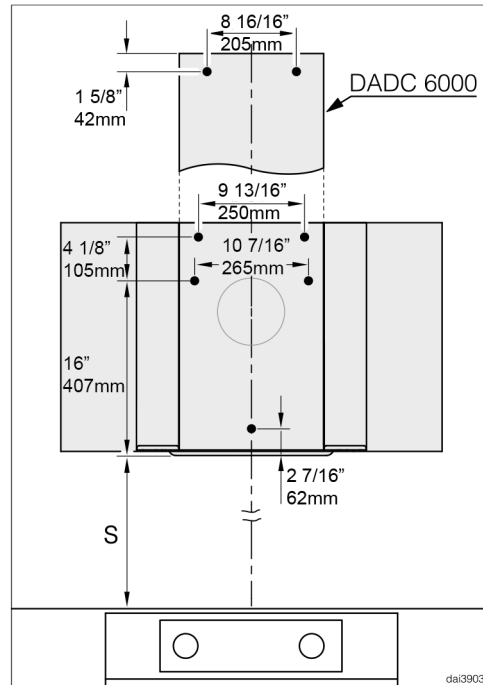

- Center unit over cooking surface
- Distances "S" is determined by the cooking surface. See "Distance between cooktop and hood (S)" dimensions.
- If studs are not available in the required locations, a plywood backing (min. 1/2" (13 mm)) **MUST** be used to reinforce support. Reinforcing material should be affixed to structural wall members. Failure to adequately support the weight as stated may result in the ventilation system falling off the wall, causing personal injury and property damage.

36" Pure Wall Ventilation Hood

INSTALLATION SPECIFICATIONS

Distance Between Cooktop and Ventilation Hood (S)

Distance between cooktop and ventilation hood (S)

Provided a larger distance is not given by the manufacturer of the cooktop, follow the minimum safety distances between a cooktop and the bottom of the hood.

Please also observe the information contained in the "IMPORTANT SAFETY INSTRUCTIONS" section.


Cooking appliance	Minimum distance S	
	Miele appliance	Non-Miele appliance
Electric Cooktops	24" (610 mm)	
Electric Barbeques and Fryers	26" (660 mm)	
Multiburner Gas Cooktops ≤ 43,000 BTU/hr (12.6 kW), no burner > 15,000 BTU/hr (4.5 kW).	26" (660 mm)	30" (760 mm)
Multiburner Gas Cooktops ≤ 73,800 BTU/hr (21.6 kW), no burner > 16,500 BTU/hr (4.8 kW)	30" (760 mm)	
Multiburner Gas Cooktops > 73,800 BTU/hr (21.6 kW), or one of the burners > 16,500 BTU/hr (4.8 kW)	Not possible	
Single Burner Gas Cooktops ≤ 20,500 BTU/hr (6 kW)	26" (660 mm)	30" (760 mm)
Single Burner Gas Cooktops > 20,500 BTU/hr (6 kW) ≤ 27,600 BTU/hr (8.1 kW)	30" (760 mm)	
Single Burner Gas Cooktops > 27,600 BTU/hr (8.1 kW)	Not possible	

36" Pure Wall Ventilation Hood

INSTALLATION SPECIFICATIONS

Optional Chimney Details

DADC 6000

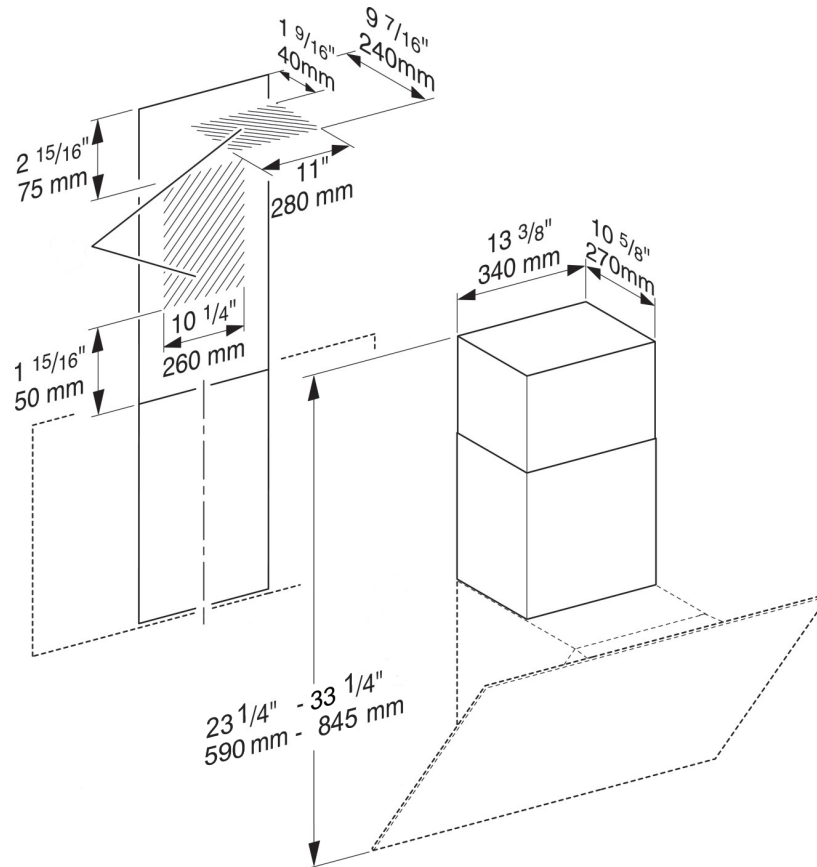

 Cut out area in wall or ceiling for entrance of 6" (150 mm) ductwork or 5" (125 mm) ductwork with a reducing collar.