

TANKLESS WATER HEATER

EP18WI30LS

Liquid Propane



Remote

PRODUCT DIMENSIONS

Height	24-1/2"
Width	18-1/2"
Depth	9-1/2"

MORE EASY-TO-USE FEATURES

LIFETIME LIMITED WARRANTY

Lifetime Limited Warranty supported by a 1-year labor, 5-year parts and 12-year heat exchanger warranty to provide peace of mind.

LASTS UP TO 20 YEARS

Lasts up to 2 times longer than standard gas tank water heaters.

LED DIGITAL DISPLAY

Conveniently adjust temperature to your needs with the LED digital display.

Available in:




Stainless
(S)

SIGNATURE FEATURES



ENDLESS HOT WATER

Endless Hot Water — Hot water when you need for as long as you need it.

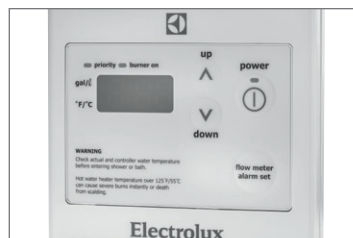


ENERGY EFFICIENT

More energy efficient than standard gas tank water heaters.



COMPACT SPACE SAVINGS

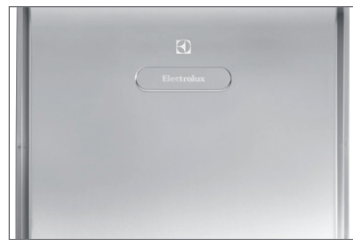

PREMIUM STAINLESS STEEL

Durable premium stainless steel exterior.

TANKLESS WATER HEATER

EP18WI30LS



LIQUID PROPANE TANKLESS WATER HEATER

CONTROL PANEL FEATURES

Hard-Wired Remote	Yes
Lockout	Yes
LED Digital Display	Yes
Flow Rate Display Mode	G / L
Temperature Display Mode	°F / °C

PERFORMANCE

Energy Factor	0.92
BTU/H (Max.)	180,000
BTU/H (Min.)	16,000
Thermal Efficiency	93%
Maximum Flow Rate (GPM – Gallons Per Minute)	9.8

FEATURES

Flow Meter Alarm	Yes
Freeze Prevention	Yes
Direct Electronic Ignition	Yes
Lightning Protection	Yes
Recirculation Compatible	Yes
Number of Temperature Settings with Remote (°F) (5° Increments)	100, 105, 110, 115, 120, 125, 130, 135, 140
Power Cord Included	Yes
Warranty ¹	Yes

ADDITIONAL FEATURES

NSF® Certified	Yes
----------------	-----

ACCESSORIES

Condensate Neutralizer Kit – PN# TWHNEUTRAL	Optional
Horizontal Concentric Vent Termination – PN# TWHHORCONC	Optional
Horizontal Installation Kit – PN# TWHHORKIT (Application Specific)	Required
Horizontal Vent Termination – PN# TWHHORHOOD (Horizontal Dual Penetration)	Optional
Quick Connect Cord – PN# TWHQCCORD (Multiple Units)	Optional
Vertical Installation Kit – PN# TWHVERTKIT (Application Specific)	Required
Vertical Vent Termination – PN# TWHVERTCAP (Vertical Dual Penetration)	Optional


SPECIFICATIONS

Indoor Wall-Mounted	Yes
Condensing	Yes
Direct Vent (SV Convertible) Exhaust	Yes
Gas Connection Size	3/4" Threaded
Gas Inlet Location	Right Bottom
Water Connection Size	3/4" Threaded
Water Inlet/Outlet Location	Left Bottom
Water Supply Pressure Range	15 - 150 psi
Condensate Connection Size	1/2" Threaded
Condensate Drain Location	Left Bottom
Power Cord Location	Middle Bottom
Voltage Rating	120V, 60Hz
Intake/Exhaust Vent Diameter	3" or 4"
Primary Heat Exchanger	Copper
Secondary Heat Exchanger	Stainless Steel
Color –	
Stainless Steel	S
Shipping Weight (Approx.)	71 Lbs.

¹Lifetime limited warranty supported by a 1-year labor, 5-year parts and 12-year heat exchanger.

NOTE: Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxappliances.com.

Specifications subject to change.

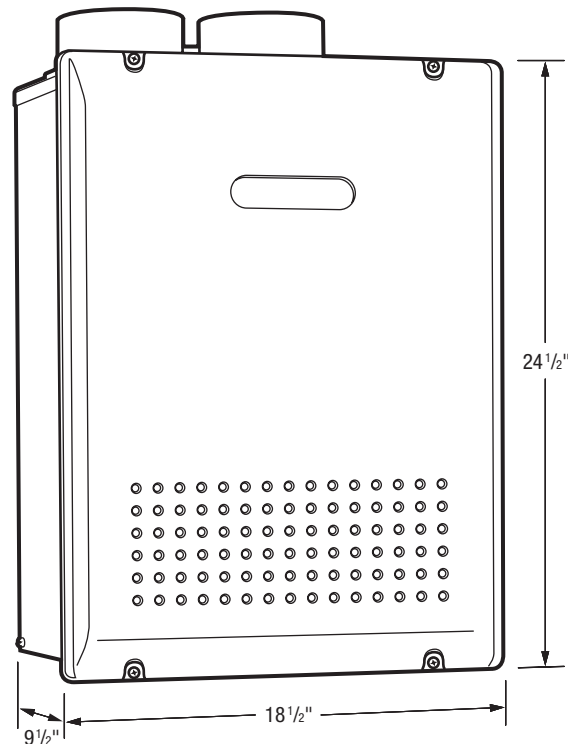

For complete Tankless Water Heater installation details, refer to Product Installation Guide on the web at electroluxappliances.com

PRODUCT DIMENSIONS

Height	24-1/2"
Width	18-1/2"
Depth	9-1/2"

Performance Flow Chart

Temp Rise (F°)	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
EP18WI30LS (GPM*)	9.8	9.2	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0	3.7	3.5	3.4

*Gallons Per Minute

FOR WATER HEATING INQUIRIES, PLEASE CONTACT ELECTROLUX WATER HEATING AT 1-888-360-8557.

Electrolux Major Appliances, N.A.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electroluxappliances.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.com

EP18WI30L 11/15

© 2015 Electrolux Home Products, Inc.



High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.