

# **TANKLESS WATER HEATER**

#### **Liquid Propane**





Remote

#### **SIGNATURE FEATURES**



**ENDLESS HOT WATER**Endless Hot Water — Hot water when you need for as long as you need it.



**ENERGY EFFICIENT** 

More energy efficient than standard gas tank water heaters.



**COMPACT SPACE SAVINGS** 



**PREMIUM STAINLESS STEEL**Durable premium stainless steel exterior.

# EP19WI30LS

# **PRODUCT DIMENSIONS**

 Height
 24-1/2"

 Width
 18-1/2"

 Depth
 9-1/2"

## **MORE EASY-TO-USE FEATURES**

#### LIFETIME LIMITED WARRANTY

Lifetime Limited Warranty supported by a 1-year labor, 5-year parts and 12-year heat exchanger warranty to provide peace of mind.

#### 3+ BATHROOMS

Satisfy home hot water demand for 3 plus bathrooms with the powerful 199,900 BTUs.

#### **LASTS UP TO 20 YEARS**

Lasts up to 2 times longer than standard gas tank water heaters.

#### **LED DIGITAL DISPLAY**


Conveniently adjust temperature to your needs with the LED digital display.

Available in:





CONTROL PANEL FEATURES					
Hard-Wired Remote	Yes				
Lockout	Yes				
LED Digital Display	Yes				
Flow Rate Display Mode	G / L				
Temperature Display Mode	°F/°C				
PERFORMANCE					
Energy Factor	0.91				
BTU/H (Max.)	199.900				
BTU/H (Min.)	16,000				
Thermal Efficiency	96%				
Maximum Flow Rate (GPM – Gallons Per Minute)	11.1				
FEATURES					
Flow Meter Alarm	Yes				
Freeze Prevention	Yes				
Direct Electronic Ignition	Yes				
Lightning Protection	Yes				
Recirculation Compatible	Yes				
Number of Temperature Settings with Remote (°F)	100, 105, 110, 115, 120				
(5° Increments)	125, 130, 135, 140				
Power Cord Included	Yes				
Warranty <sup>1</sup>	Yes				
ADDITIONAL FEATURES					
NSF® Certified	Yes				
ACCESSORIES					
Condensate Neutralizer Kit – PN# TWHNEUTRAL	Optional				
Horizontal Concentric Vent Termination –	·				
PN# TWHHORCONC	Optional				
Horizontal Installation Kit – PN# TWHHORKIT (Application Specific)	Required				
Horizontal Vent Termination — PN# TWHHORHOOD (Horizontal Dual Penetration)	Optional				
Quick Connect Cord – PN# TWHQCCORD (Multiple Units)	Optional				
Vertical Installation Kit – PN# TWHVERTKIT (Application Specific)	Required				
Vertical Vent Termination – PN# TWHVERTCAP (Vertical Dual Penetration)	Optional				
SPECIFICATIONS					
Indoor Wall-Mounted	Yes				
Condensing	Yes				
Direct Vent (SV Convertible) Exhaust	Yes				
Gas Connection Size	3/4" Threaded				
Gas Inlet Location	Right Bottom				
Water Connection Size	3/4" Threaded				
Water Inlet/Outlet Location	Left Bottom				
Water Supply Pressure Range	15 - 150 psi				
Condensate Connection Size	1/2" Threaded				
Condensate Drain Location	Left Bottom				
Power Cord Location	Middle Bottom				
Voltage Rating	120V, 60Hz				
Intake/Exhaust Vent Diameter	3" or 4"				
Primary Heat Exchanger	Copper				
Secondary Heat Exchanger	Stainless Steel				
Color –					
Stainless Steel	S				
Shipping Weight (Approx.)	82 Lbs.				
Lifetime limited warranty supported by a 1-year labor, 5-year parts and 12-year					

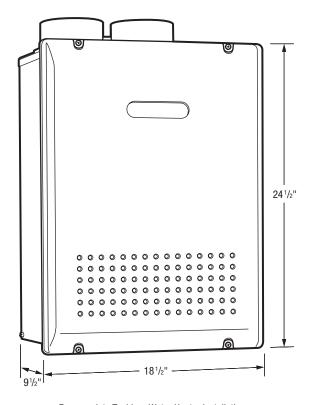

For complete Tankless Water Heater installation details, refer to Product Installation Guide on the web at electroluxappliances.com

Height	24-1/2"
Width	18-1/2"
Depth	9-1/2"

## **Performance Flow Chart**

Temp Rise (F°)	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
EP19WI30LS (GPM*)	11.1	10.6	9.3	8.4	7.4	6.8	6.2	5.8	5.3	5.0	4.6	4.4	4.1	3.9	3.7

\*Gallons Per Minute

FOR WATER HEATING INQUIRIES, PLEASE CONTACT ELECTROLUX WATER HEATING AT 1-888-360-8557.

