FRIGIDAIRE GALLERY.

Freestanding Range

FGGF3685TS



Signature Features



True Convection

Single convection fan circulates hot air throughout the oven for faster and more even multi-rack baking.



SpaceWise® Cooktop **Oval Burner**

Cook pancakes, hamburgers, or quesadillas with the SpaceWise® Oval Burner that is perfectly shaped to evenly heat griddles or other longer cookware.



Quick Preheat

Preheat in just a few minutes.1



Effortless™ Temperature Probe with Auto Keep Warm

The Effortless™ Temperature Probe allows you to set the desired finished temperature and alerts you when that temperature has been reached. The oven then holds the desired temperature of the meat by switching to a Keep Warm function for better cooking results.

36" Gas

Product Dimensions

Height (Max.) 49" Width 36" Depth (Including Handle) 30-3/4"

More Easy-To-Use Features

Effortless™ Convection Conversion

Takes the guesswork out of convection cooking - our oven automatically adjusts standard baking temperatures to convection temperatures for consistent results.

One-Touch Quick Self-Clean

Your oven cleans itself - so you don't have to. Self clean options available in 2-, 3- and 4-hour cycles.

Power Burner

Power Burner offers more power and faster boil time with 18,200 BTU burner.

Low Simmer Burner

Perfect for cooking delicate foods and sauces.

Continuous Corner-to-Corner

Move heavy pots & pans without lifting with continuous, corner-to-corner

Built with American Pride

Designed, enginereed and assembled in the U.S.A. Appliances that are highperforming, more accessible, and more innovative than ever.

Sabbath Mode (Star-K* Certified)

Available in:




Burners	BTU
Right Front	18,200
Right Rear	5,000
Left Front	15,000
Left Rear	9,500
Center Oval	10.000

1Based on single rack cooking performance, not set temperature, using Quick Preheat.



Features		
Oven Control/Timing System	Express-Select® Controls	
Surface Type	Gas-Through-Glass with Stainless Steel Frame	
Sealed Gas Burners	Yes	
Grates	Continuous Cast Iron w/Black Matte Finish	
Window	Large	
Exterior Door Finish	Stainless Steel	
Handle Design	Stainless Steel	
Exterior Finish (Side Panels)	Black	
Convection System	True Convection	
Oven Cleaning System	Self Clean	
Drawer Functionality		
Oven Controls		
Bake/Broil	Yes/Variable (400-550°F)	
Effortless™ Convection Conversion	Yes	
Convection Bake/Broil/Roast	Yes/No/Yes	
Quick Bake Convection		
Quick Preheat	Yes	
Effortless™ Temperature Probe	Yes	
Keep Warm	Yes	
Add-a-Minute	Yes	
Delay Start	Yes	
Self Clean	2, 3, 4 Hours	
Quick Clean Option	Yes	
Delay Clean	Yes	
Kitchen Timer/Timed Cook Option	Yes/Yes	
Auto Oven Shut-Off	Yes	
Oven Lockout	Yes	
Lower Drawer Control		
Cooktop Features		
Right Front Burner (BTU)	18,200	
Right Rear Burner (BTU)	5,000	
Left Front Burner (BTU)	15,000	
Left Rear Burner (BTU)	9,500	
Center Extra Zone Burner (BTU)	10,000	
Oven Features		
Capacity (Cu.Ft.)	6.0	
Oven Light	2 Halogen	
Rack Configuration	3 Handle Racks	
Baking System	Even Baking Technology	
Broiling System	Vari-Broil™ Hi/Lo	
Bake Burner/Broil Burner (BTU)	27,000/11,500	
Optional Accessories		
LP Gas Conversion Kit	Included	
Certifications		
Sabbath Mode (Star-K* Cert.)	Yes	
Specifications		
Oven Interior (H x W x D)	17-5/8" x 30-1/8" x 19-5/8"	
Power Supply Connection Location	Left Bottom Rear	
Gas Supply Connection Location	Right Bottom Rear	
Voltage Rating	120V/60Hz/7A	
Chinain a Mainh (Annua)	705.11	

FRIGIDAIRE GALLERY.

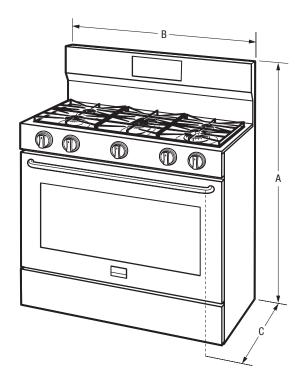

NOTE: For planning purposes only. Always consult local and national electric and gas codes.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A - Height (Max.)	49"
B-Width	36"
C-Depth (Including Handle)	30-3/4"
Depth with Door Open 90°	47-3/4"


Cabinet Cutout Dimensions	
Height (Standard)	36"
Width (Min.)	36-1/4"
Depth (Min.)	24"

Accessories information available on the web at **frigidaire.com**

Shipping Weight (Approx.)

395 Lbs.

FGGF3685TS 36" Gas

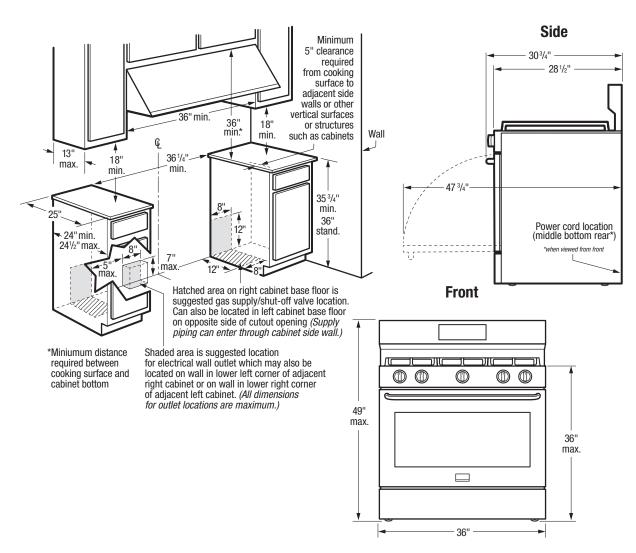

Freestanding Range Specifications

- Product Shipping Weight (approx.) 395 Lbs.
- Voltage Rating 120V/60 Hz/7Amps
- · Always consult local and national electric and gas codes.
- Make sure wall coverings around range can withstand heat generated by range.
- Linoleum or any other synthetic floor covering located beneath range, must be capable of withstanding minimum heat of 90°F above room temperature without shrinking, warping or discoloring. Insulating pad or 1/4"-thick plywood required between range and a carpeted floor.
- Do not obstruct flow of combustion air at oven vent nor around base or beneath lower front panel of range. Range requires fresh air for proper burner combustion.
- Do not install range beneath any downward-blowing, overhead vent hood or air curtain.
- Range ships with 3/4" factory regulator.
- Range is LP Gas convertible. (Optional LP Gas conversion kit available.)
- · Floor beneath range MUST be solid and level.
- Overhead cabinetry should not exceed a 13" maximum depth.

- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Range can be installed flush to wall with 0" minimum rear clearance.
- 5" minimum clearance required from edge of rangetop to nearest combustible wall on either side of range above 36" height.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- Follow all dimension requirements provided to prevent property damage, potential fire hazard, and incorrect countertop and cabinet cuts.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

Optional Accessories

• LP Gas Conversion Kit - (Included).

