



Side-by-Side Refrigerator

FPSS2677RF

25.6 Cu. Ft. Standard-Depth



Signature Features



PureAir Ultra® Filtration System

Fresh air offers great taste. PureAir Ultra® Filtration removes up to 7 times more odor than baking soda to keep ingredients tasting fresh by removing odor particles with fast-acting, highly absorbent carbon technology.¹



Smudge-Proof™

Resists fingerprints and cleans easily.



PureSource Ultra® II Water Filtration

Drink and Cook with Pure Water. PureSource Ultra® II Water Filters remove 99.3% of lead and 99.99% of cysts from your household water.²



SpacePro™ Ice Maker

Offers more freezer space, and more ice storage.³

Product Dimensions

Height (Including Hinges & Rollers)	69-7/8"
Width (Doors)	36"
Depth (Including Door)	33-3/8"

More Easy-To-Use Features

SpacePro™ Adjustable Door Bins

Optimize your space with our 2 adjustable gallon-size door bins.

PowerGlide™ Sliding Shelves

Offers 3 sliding shelves for accessibility to fresh foods — and they're spill-safe.

SpacePro™ Crisper Bins

Keep produce fresh with our stacked crisper bins.

SpacePro™ Freezer System

Optimize your freezer space with our SpacePro™ Freezer System featuring one door bin, four shelves, two baskets, and three tilt-out door bins, keeping frozen foods organized and accessible.

Automatic Alerts

Alerts you if the door is left open, if the temperature rises or if the power goes out so your food stays at its optimal temperature.

PowerBright™ LED Lighting

Find fresh foods quickly with PowerBright™ bright LED Lighting.

Trim Kit

Built-in look, without the remodel. Optional trim kit available.

Sabbath Mode (Star-K® Certified)

Available in:



Stainless
(F)




¹Based on a six-hour closed door test of certain common odors in the fresh food compartment of a 21 cu.ft. refrigerator.

²Tested and certified by NSF® International. See performance data sheet for individual contaminants and reduction performance.

³Compared to a 2015 Frigidaire® side-by-side refrigerator.

Features	
Door Design	Flat
Door Handle Design	Stainless Steel
Cabinet Finish	Grey
Door Stops/Door Closers	Yes/Yes
Door Hinge Covers	Hidden
Rollers - Front/Rear	Adjustable/Yes
Energy Saver Plus Technology	Yes
Water Filter Location	Top Right Rear
Sound Package	Quiet Pack
Dispenser	
Controls	Pro-Select®
Dispenser Design	Flush, Single Paddle
Number of Control Buttons	11
Crushed Ice/Cube Ice/Water	Yes/Yes/Yes
Ice Option	PowerPlus® Ice
Freeze Option	PowerPlus® Freeze
Display On/Off Option	Yes
Control Lock/Light	No/Yes
Temp/Door Ajar/Power Failure Alerts	Yes/Yes/Yes
Water Filter Change Indicator Light	Yes
Air Filter Change Indicator Light	Yes
Refrigerator Features	
Interior Lighting	PowerBright™ LED
Water Filter Type	PureSource Ultra® II
Air Filter Type	PureAir Ultra®
Fixed Shelves	
Sliding Shelves	3 PowerGlide™
Cool Zone™ Drawer	1 Stacked
Wine/Can Rack	
SpacePro™ Upper Crisper/ SpacePro™ Lower Crisper	1 Clear/ 1 Clear
Humidity Controls	2
Dairy Compartment	1 Clear
SpacePro™ Fixed Door Bins	2 Two-Liter Clear
Adjustable Door Bins	2 One-Gallon Clear
Non-Slip Bin Liner/Bottle Retainers	2 Silver/1 Clear
Condiment Bin	
Freezer Features	
Door Bins/Tilt-Out Wire Door Bins	1 Clear/3
Fixed Shelves	2 Glass
Full Extension Baskets	
Full Freezer Baskets	1 Plastic/1 Wire
Half Freezer Baskets	
Ice Cream Shelf/Pizza Shelf	Yes/Yes
SpaceSaver™ Shelf	
Lighting	PowerBright™ LED
SpacePro™ Automatic Ice Maker	Yes
Certifications	
A.D.A. Compliant¹	Yes
ENERGY STAR®	
Sabbath Mode (Star-K® Certified)	Yes
Specifications	
Total Capacity (Cu. Ft.)	25.6
Refrigerator Capacity (Cu. Ft.)	16.6
Freezer Capacity (Cu. Ft.)	9
Power Supply Connection Location	Right Bottom Rear
Water Inlet Connection Location	Left Bottom Rear
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @ 120 Volts²	1.02
Amps @ 120 Volts	8.5
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	300 Lbs.

Standard Refrigerator Depth vs. Counter Depth

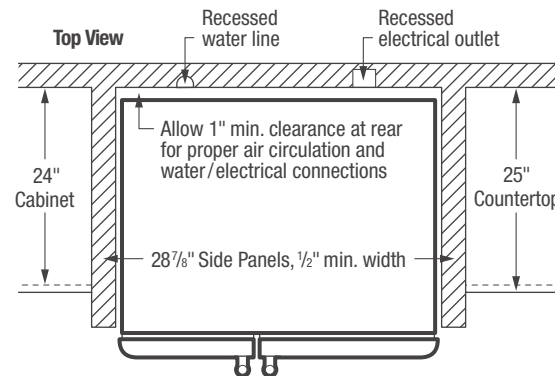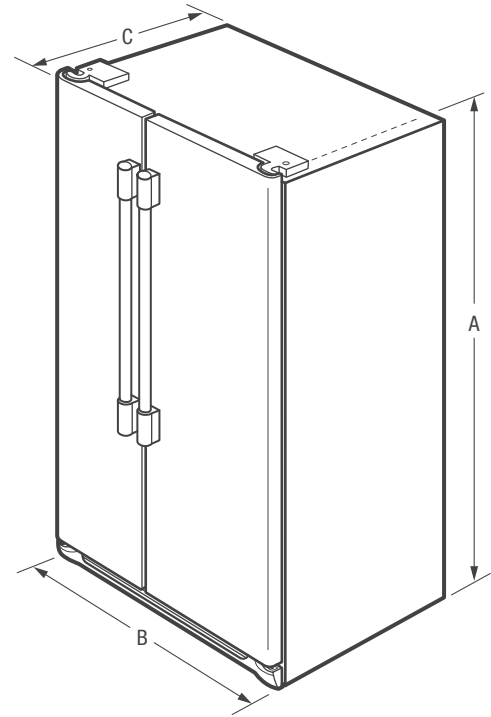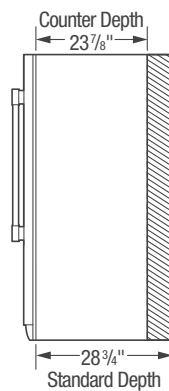

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Overall Exterior Dimensions	
A - Height (Incl. Hinges & Rollers)	69-7/8"
B - Cabinet Width/Door Width	35-7/8" / 36"
C - Depth (Incl. Door)	33-3/8"
Depth with Door Open 90°	50"

¹When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

²For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Accessories information available on the web at frigidaire.com


FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FPSS2677R 08/16

© 2016 Electrolux Home Products, Inc.

Specifications subject to change.

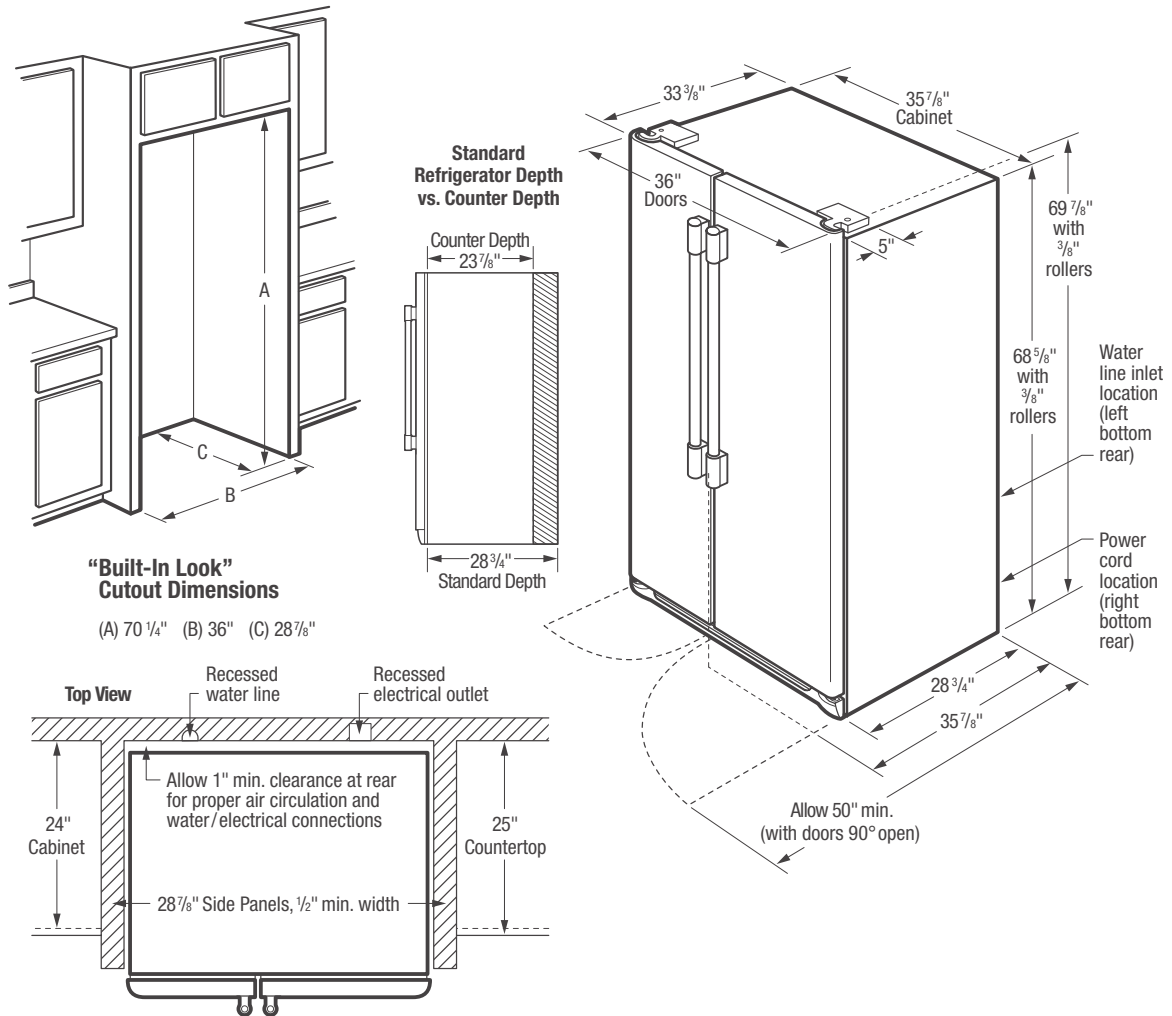

Side-by-Side Refrigerator Specifications

- Product Shipping Weight (approx.) – 300 Lbs.
- Voltage Rating – 120V/60 Hz/15 Amps
- Connected Load (kW Rating) @ 120 Volts = 1.02 kW
(For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (*Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.*)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- For proper ventilation, front grille MUST remain unobstructed.
- Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure – Cold water line must provide between 30 and 100 pounds per square inch (psi).
- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.

"Built-In Look" Specifications

- Minimum opening of 70-1/4" H x 36" W x 28-7/8" D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
 CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FPSS2677R 08/16

© 2016 Electrolux Home Products, Inc.



Specifications
subject to change.