

JP3036DL/TL/SL


GE® Appliances 36" Built-In Knob Control Electric Cooktop

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

IMPORTANT: Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.


NOTE: 36" Ribbon cooktops are approved for use over select GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered. **Before installing, consult installation instructions packed with product for current dimensional data.**

APPROXIMATE COOKING DIMENSIONS

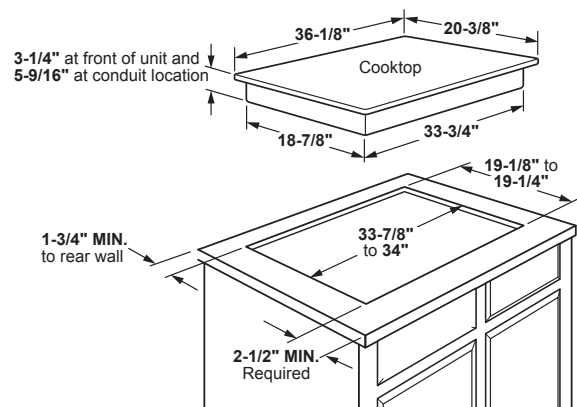


To insure accuracy, it is best to make a template when cutting the opening in the counter

INSTALLATION ABOVE A WALL OVEN

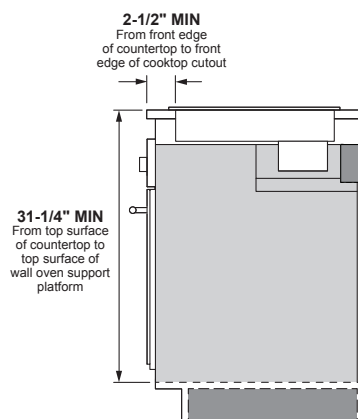

13" MAX. depth of unprotected overhead cabinets (when no hood or microwave is installed)

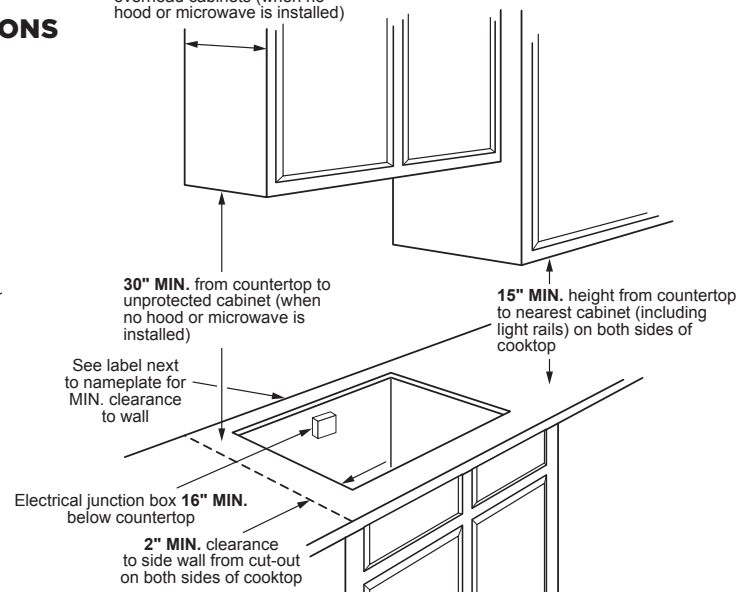

VOLTAGE (60HZ AC)	240V	208V
CONNECTED LOAD (MAX.)	9.0kW	7.1kW
CURRENT DRAW (MAX.)	37.5 Amps	34.3 Amps
RECOMMENDED CIRCUIT BREAKER[†]	40 Amps	40 Amps

[†]**NOTE:** Check local codes for required breaker size.



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/18

JP3036DL/TL/SL

GE® Appliances 36" Built-In Knob Control Electric Cooktop

FEATURES AND BENEFITS

Five radiant cooking elements – Cook foods quickly and evenly on this sleek, glass surface

12"/9" dual element – Use different pan sizes on this single, 2,700-watt flexible element

8" Power Boil element – Get rapid heat from this powerful 2,500-watt element

Fifth element warming zone – Provides low-heat capability for foods

Melt setting – Gently melt delicate foods without burning or scorching


Hot surface indicator lights – Know when elements are too hot to touch with a quick glance

Cooktop “On” indicator light – A light lets you know when an element is active

Model JP3036DLBB – Black on black

Model JP3036TLWW – True white

Model JP3036SLSS – Stainless steel

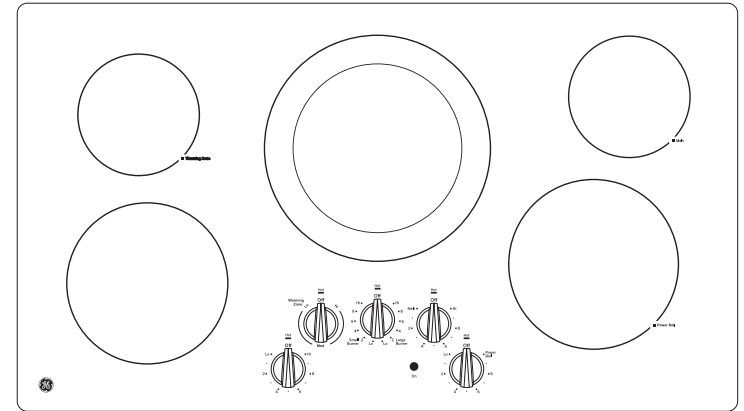

GUARANTEED FIT

Replacing a similar cooktop from GE or another brand? GE cooktops are guaranteed for an exact fit to make replacement easy

Visit geappliances.com for more info

