

WS-30/S



FEATURES

- Two independent temperature zones hold reds and whites at proper serving temperature
- Dual evaporators for constant, moderate humidity so corks don't dry out
- Shelves store 750 ml bottles, half bottles and magnums
- Home security system connection
- UV-resistant glass door protects against premature wine aging
- Smooth roller-glide shelves for access without agitating wine
- Illuminated display shelf for prized bottles
- Rigorously tested in our U.S. manufacturing facilities to ensure at least 20 years of heavy use
- Exceptional 24/7 support from our Customer Care team based in Madison, Wisconsin and just footsteps from our factory
- Illuminated touch control panel
- Discreet interior lighting
- Star-K compliant with installation of a harness kit.


ACCESSORIES

- Stainless Steel Side Panel
- White Side Panel
- Dual installation kit with or without dual wide grille—84" finished height
- Flush inset panels in stainless steel with tubular or pro handles
- Full-length standard and extended framed handles
- Grilles for 83" or 88" finished height (84" is standard)
- Stainless steel kickplate
- Lock kit

Accessories are available through an authorized Sub-Zero dealer. For local dealer information, visit subzero-wolf.com/locator.



HANDLE OPTIONS

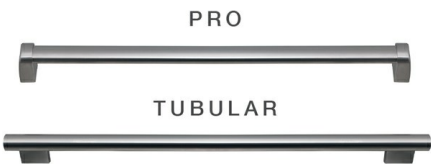

DIMENSIONS

Technical drawing of the LG LRF20900 refrigerator showing height dimensions. The drawing includes a front view on the left and a side view on the right. Dimensions are given in inches and millimeters.

Front View Dimensions:

- Top Panel Width: 30" (762)
- Total Height: 84" (2134)
- Main Body Height: 73 3/4" (1873)


Side View Dimensions:

- Total Height: 26 3/16" (665)
- Main Body Height: 23 7/8" (606)
- Bottom Gap: 4" (102)


HEIGHT DIMENSIONS $\pm 1/2"$ (13)

Diagram illustrating a window opening with dimensions and labels:

- Top opening width: 7" (178)
- Right side opening width: 6" (152)
- Height from floor: 75 1/2" (1918)
- Label: RIGHT SIDE OF OPENING



STANDARD INSTALLATION

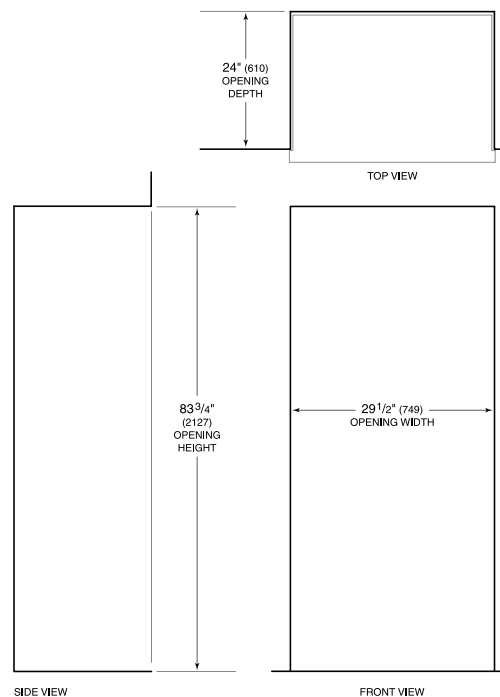

NOTE: Shaded line represents profile of unit.