

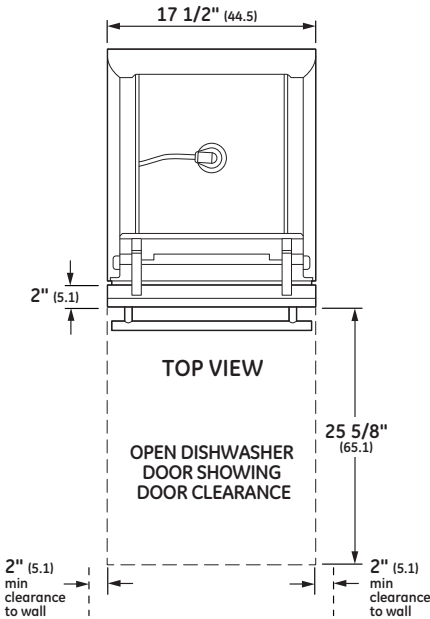


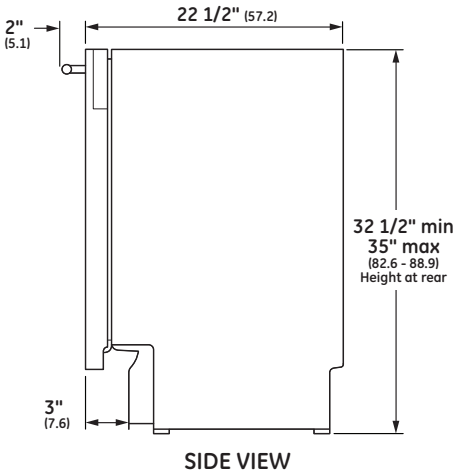

SPECIFICATIONS

Overall Width	17 1/2" (44.5 cm)
Overall Height	32 1/2" (82.6 cm) Min 35" (88.9 cm) Max
Overall Depth	22 1/2" (57.2 cm)
Door Clearance	25 5/8" (14.3 cm)
Overall Dishwasher Capacity	8 Place Settings
Minimum Cabinet Width	17 5/8" (44.8 cm)
Minimum Cabinet Depth	22" (55.9 cm)
Cutout Width	17 5/8" (44.8 cm) Min 18" (45.7 cm) Max
Cutout Height	32 1/2" (82.6 cm) Min 35" (88.9 cm) Max
Electrical Requirements	9.0 A
Hose Length	No more than 10' (3 m)
Voltz/Hertz/Amps	115 V, 60 Hz, 15 or 20 amp circuit
Shipping Weight	83 lb (38 kg)


OVERALL DIMENSIONS

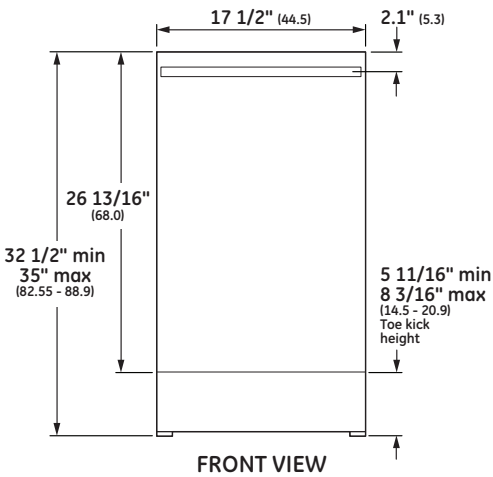


Dimensions in parentheses are in centimeters unless otherwise noted.



INSTALLATION

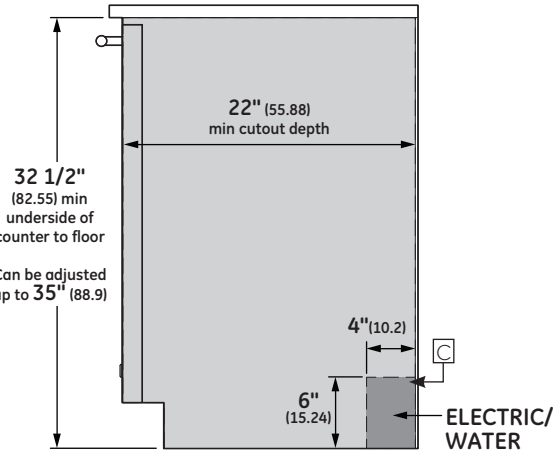

FLUSH CUTOUT INSTALLATION

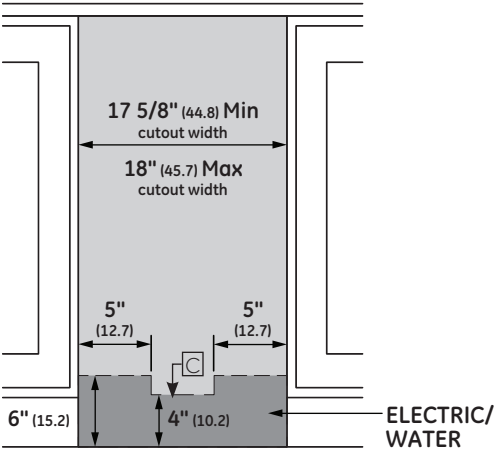

INSTALLATION CUTOUT FRONT VIEW

NOTES

- A The dishwasher drain hose must be no more than 10 feet in length for proper drainage.
- B A reduced-height installation (32-1/2" min.) beneath a 34" countertop can be accomplished by screwing in the rear legs flush with the bottom support, removing the front leveling legs and adding shims to level.
- C Water and electrical must be routed through the back wall shown in shaded area.
- D To prevent siphoning, an air gap or high drain loop must be used.

FEATURES AND BENEFITS

INTEGRATED DESIGN

Offers a stainless steel door and slim tubular handle

FIVE-LEVEL WASH SYSTEM

Provides effective, yet quiet cleaning power

PEARLESCENT GRAY RACKS WITH BALL-TIPPED TINES

Provide plenty of space and loading flexibility

STEM SAFE SHELF

Allows for odd-shaped items and delicate stemware

HIDDEN, INTEGRATED ELECTRONIC CONTROLS

Allow easy activation of wash cycles: heavy wash, normal wash, light wash, china and rinse only

