



Stainless

Overlay

3018RF

3000 SERIES

FEATURES

PERFORMANCE

- U-Select™ Control: Integrated OLED display with intuitive user interface ergonomically located on top of door
- Digitally controlled convection cooling system
- Refrigeration capacity of 3.4 cubic feet
- ENERGY STAR® and CEE Tier 3 rated
- U-Select™ Control provides 4 distinct settings designed to provide precise refrigeration and maximize preservation
- Default temperature settings of Deli Mode: 36° F, Market Mode: 38° F, Pantry Mode: 42° F, Root Cellar Mode: 50° F
- Zone settings are designed to help produce last longer and taste better



Deli mode has a temperature range between 34° and 40° F with a set point at 36° F.

INTERIOR / EXTERIOR


- Three full-extension, slide-out drawer bins provide quick, easy access and viewing of all items stored
- Lower drawer bins fit one-gallon containers and two-liter bottles with additional space for more storage
- All drawer bins are removable for easy cleaning and are designed to maximize various types of storage
- Black interior with LED theater lighting located on side interior provides excellent lighting to all bins

INTEGRATION


- Standard commercial stainless steel handle is interchangeable with professional handle option
- Adjustable toe-kick - front to back and up and down allows for seamless installation
- Front adjustable rear leveling legs greatly eases installation
- Allow a 2-1/2" clearance on hinged side for 90° door opening when installed adjacent to a wall (for stainless steel model)
- Allow 1/4" width overall for proper installation (see backside for details)
- No additional clearance around sides, top or rear of unit is needed for ventilation



Single Zone Convection Cooling System featured in 3018RF

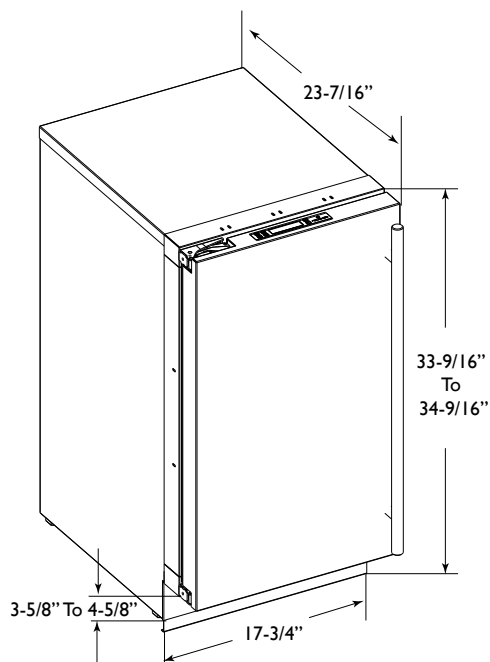

3018RFS Stainless Model

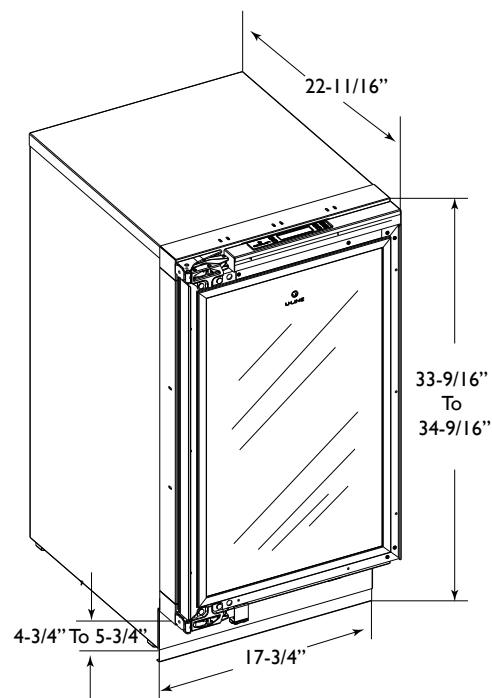

3018RFOL Overlay Model

DIMENSIONS AND SPECIFICATIONS

OVERALL DIMENSIONS

Height	33-9/16" (85.2)
Width	17-3/4" (45)
Depth	23-7/16" (60)
With stainless steel handle	25-5/16" (64.3)

Shipping weight:

Overlay Model	116 lbs (52.6 kg)
Stainless Model	124 lbs (56.2 kg)


Running amps	2.4
Amps pertain to voltage rating	110/115 volt, 60 Hz
ENERGY STAR® and CEE Tier 3 Rated	

Capacities:

Refrigerator volume	3.4 Cu Ft
---------------------	-----------

3018RFS

Stainless Right-hand	U-3018RFS-00
Stainless Left-hand	U-3018RFS-01
Overlay Right-hand	U-3018RFOL-00
Overlay Left-hand	U-3018RFOL-01

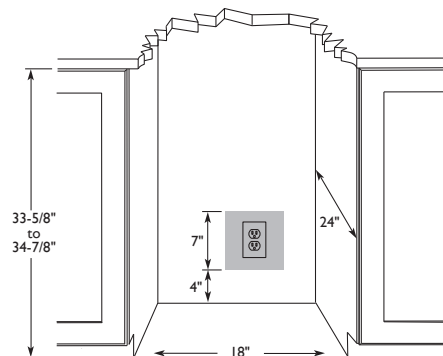

Please visit www.u-line.com for installation guide.

All specifications are subject to change without notice.

