



15" Marvel Professional High-Efficiency Single Zone Wine Cellar

Model # MP15WS

Performance

- Up to 2x more efficient than leading competitors
- Dynamic Cooling Technology™ delivers the industry's best temperature stability and rapid cool down, safely bringing wine to temperature without compromising integrity
- Vibration Neutralization System™ protects wine from agitation, allowing it to come to full maturation
- Heavy-gauge wine racks are shaped to safely cradle each wine bottle
- Full-extension ball bearing smooth-glide shelf system prevents jarring
- Thermal-efficient cabinet ensures optimum preservation and energy efficiency while maximizing capacity
- Argon-filled, UV-resistant tinted dual pane glass door protects contents from damaging ultraviolet light, while conserving energy
- Now even quieter operation thanks to exclusive design enhancements to buffer and minimize sound

Storage Capabilities

- 2.7 cu. ft. capacity, stores 24 bottles of wine total with (6) 4-bottle smooth-glide wine racks

Touchscreen Controls

- Multifunction Marvel Intuit™ Integrated Controls allow you to select a precise cabinet temperature from 40° F to 65° F
- Vacation mode conserves energy during times when unit is not in use
- For expanded information on all functions, open the gatefold at the beginning of this catalog

Aesthetics

- Soft-close integrated hinge provides a seamless zero clearance installation and a smooth, gentle close
- Professional styling: stainless steel framed glass door, sturdy full-length handle, sleek stainless steel shelf fronts and stainless steel toe kick adjustable to 4"
- Two-stage, soft blue theater-style LED lighting and sophisticated midnight black interior
- Finish options: stainless steel or overlay (panel ready)

Additional Convenience

- Close Door Assist System™ gently and automatically draws door to a close, ensuring door is never accidentally left ajar
- Door lock provides added safety and security
- Height adjustment up to 1" with leveling legs
- Filler kit available for 18" wide opening (see page 82)
- 3-year parts and labor warranty, 5-year sealed system parts warranty



Finish Options



Stainless Steel



Framed Overlay (Panel Ready)*

Ordering Options

Stainless Frame, Glass Door with Lock, Integrated Right Hinge, Professional Handle	MP15WSG3RS
Stainless Frame, Glass Door with Lock, Integrated Left Hinge, Professional Handle	MP15WSG3LS
Panel-Ready Framed Glass Door with Lock, Integrated Right Hinge (Handle Not Included)*	MP15WSF3RP
Panel-Ready Framed Glass Door with Lock, Integrated Left Hinge (Handle Not Included)*	MP15WSF3LP

*Easy installation! No panel kit required. Consult your cabinet maker for overlay panel and handle options.

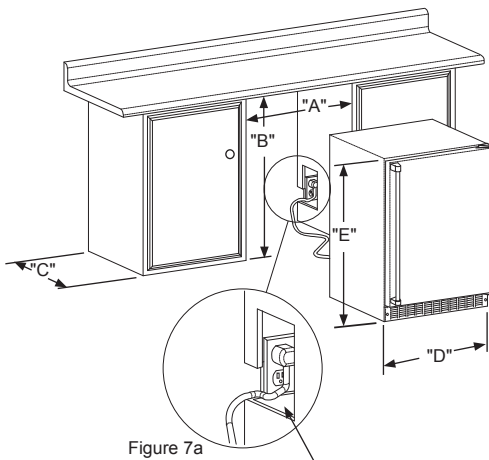


Figure 7

Figure 7a



Figure 8

If necessary to gain clearance inside the rough-in opening a hole can be cut through the adjacent cabinet and the power cord routed through this hole to a power outlet. Another way to increase the available opening depth is to recess the power outlet into the rear wall to gain the thickness of the power cord plug. Not all recessed outlet boxes will work for this application as they are too narrow, but a recessed outlet box equivalent to Arlington #DVFR1W is recommended for this application, (see Figure 8).

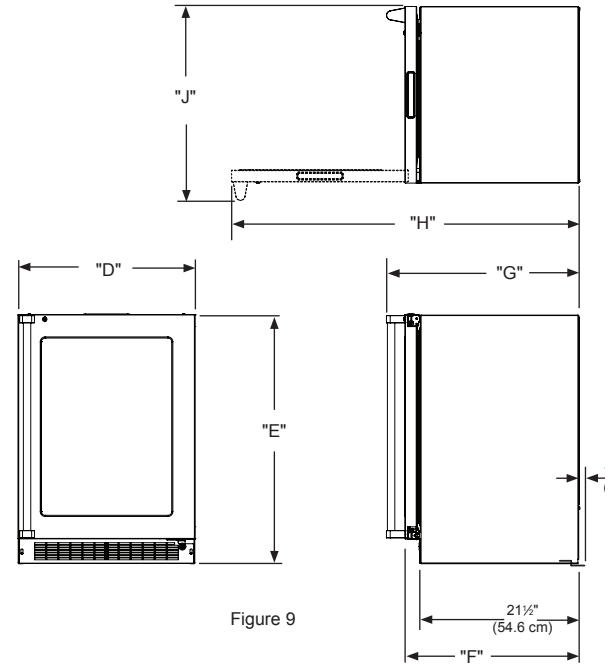


Figure 9

MODEL	ROUGH-IN OPENING DIMENSIONS			CABINET DIMENSIONS					
	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	"J"
MP15WSG	15" (38.1 cm)	**34" to 35" (86.4 to 88.9 cm)	*	14 ⁷ / ₈ " (37.8 cm)	33 ³ / ₄ " to 34 ³ / ₄ " (85.7 to 88.3 cm)	23 ²³ / ₃₂ " (60.2 cm)	26 ⁷ / ₃₂ " (66.6 cm)	37 ¹³ / ₃₂ " (95 cm)	17 ⁷ / ₁₆ " (44.3 cm)
MP15WSF	15" (38.1 cm)	**34 ¹ / ₄ " to 35 ¹ / ₄ " (87 to 89.5 cm)	*	14 ⁷ / ₈ " (37.8 cm)	34" to 35" (86.4 to 88.9 cm)	22 ⁷ / ₈ " (58.1 cm)	-	37 ¹ / ₂ " (95.2 cm)	14 ¹ / ₈ " (35.9 cm)
MP24**G	24" (61 cm)	**34" to 35" (86.4 to 88.9 cm)	*	23 ⁷ / ₈ " (60.7 cm)	33 ³ / ₄ " to 34 ³ / ₄ " (85.7 to 88.3 cm)	23 ²³ / ₃₂ " (60.2 cm)	26 ⁷ / ₃₂ " (66.6 cm)	46 ¹³ / ₃₂ " (117.9 cm)	26 ⁷ / ₁₆ " (67.2 cm)
MP24**F	24" (61 cm)	**34 ¹ / ₄ " to 35 ¹ / ₄ " (87 to 89.5 cm)	*	23 ⁷ / ₈ " (60.7 cm)	34" to 35" (86.4 to 88.9 cm)	22 ⁷ / ₈ " (58.1 cm)	-	46 ¹ / ₂ " (118.1 cm)	23 ⁷ / ₈ " (58.7 cm)

Width	14 7/8"
Interior Finish	Black
Capacity	Up to 24 wine bottles
Shelving System	Side Mount - Bottle shape wire
Shelf Fronts	Stainless Steel
Other Storage	
Interior Lighting	1 Blue LED Pod
Toe Grill Finish	Stainless Steel
Hinge	Soft Close Integrated Hinge
Handle	Professional

Control Type	Intuit™
Temperature Range	40° - 65° F
Lock	Yes
Electrical Requirements	120V / 60Hz / 15A
Length of Power Cord	5'
Product Dimensions	14 7/8" W x 33 3/4" H x 21 1/2" D
Depth to Front of Door	23 23/32"
Depth to Handle	26 7/32"
Depth with door at 90°	37 13/32"
Shipping Weight	125 lbs

Finishes	SS, O
Vacation / Sabbath Mode	Yes
Agency Approvals	CSA
ENERGY STAR Certified	NA

Finishes Key

SS = Stainless Steel
O = Overlay

Figure 16
Right Hand Hinged
Door 15" (38.1 cm) wide
appliance

Top of door

Clearance for screw head, 4 places

Hinge side of door

Clearance for hinge 2 places

1/4" (6 mm) Deep

14 3/4" (37.5 cm)

4 7/8" (12.4 cm)

5" (12.7 cm)

1 3/16" (3 cm)

1 3/4" (4.4 cm)

3 5/8" (7.9 cm)

1" (25.4 mm) diameter counter bore 1/4" (6 mm) deep 4 places.

3 7/32" (9.7 cm)

30 11/32" (77.1 cm)

3 5/8" (7.9 cm) Minimum

1/4" (6 mm) radius is permissible

This side facing interior

3 5/8" (7.9 cm) Minimum

1 5/32" (2.9 cm)

2" (5.1 cm)

3 1/16" (9.4 cm)

1 1/2" (3.8 cm) typical

1 11/16" (4.3 cm)

4 5/8" (10.5 cm) Minimum

marvelrefrigeration.com | 800.223.3900