


UP27I SERIES RANGE HOOD

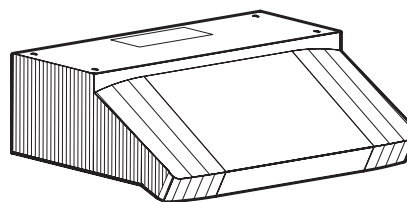

**For domestic
cooking only.**

Offers modern styling, high performance, and durable under-cabinet construction to meet the needs of professional-quality residential cooktops.

A complete installation requires several optional components. Refer to page 2 when planning your installation.

FEATURES

HOOD:

- Widths available - 30" to 48" in 6" increments
- Stainless Steel, 20 gauge, type 304
- Stainless Steel baffle filters with removable mesh element - easily accessible, dishwasher safe
- Variable cooktop lighting (Uses 50W, GU10 halogen lamps. 30" & 36" wide hoods = 2 lamps, 42" & 48" wide hoods = 4 lamps. Bulbs included.)
- Solid-State, infinite speed blower control with speed memory
- Exclusive, Heat Sentry™ turns blower ON to HIGH speed when excess heat is detected
- Versatile ducting allows for 3¼" x 14" and 3¼" x 10"
- Evolution™ filter - baffle filter with integrated micromesh filter
- For indoor use only
- California Title 24 compliant

NON-DUCTED RECIRCULATING KIT:

ANKUP Series (Optional)

- Stainless steel, type 304
- Available for hood widths up to 48"
- Charcoal filters included
- Replacement charcoal filters:
 - Model AFCUP2730 or SV17020 - for 30" wide hood
 - Model AFCUP2736 or SV17021 - for 36" wide hood
 - Model AFCUP2742 or SV17022 - for 42" wide hood
 - Model AFCUP2748 or SV17023 - for 48" wide hood

BACKSPLASH:



RMP Series (Optional)

- Widths - 30" to 48" in 6" increments
- Stainless steel, 22 gauge, type 430 - protects back wall and wipes clean easily
- Two (2) dual position condiment storage shelves

SPECIFICATION:

- 120 VAC, 60 Hz,
- 3.5 Amps (30" & 36" widths)
- 4.0 Amps (42" & 48" widths)
- 700 Max. CFM (3¼" x 14", high speed, horizontal discharge)
- 600 Max. CFM (3¼" x 14", high speed, vertical discharge)
- 650 Max. CFM (3¼" x 10", high speed, horizontal discharge)
- 550 Max. CFM (3¼" x 10", high speed, vertical discharge)
- Sone Rating - No greater than 8.5 Sones (all applications)

UP27I Series Hood

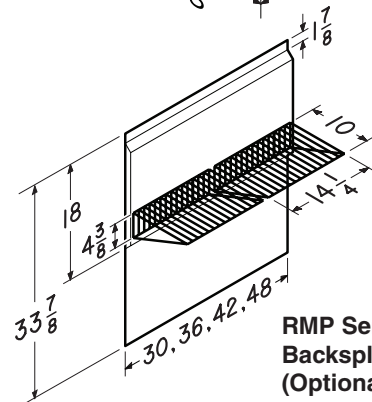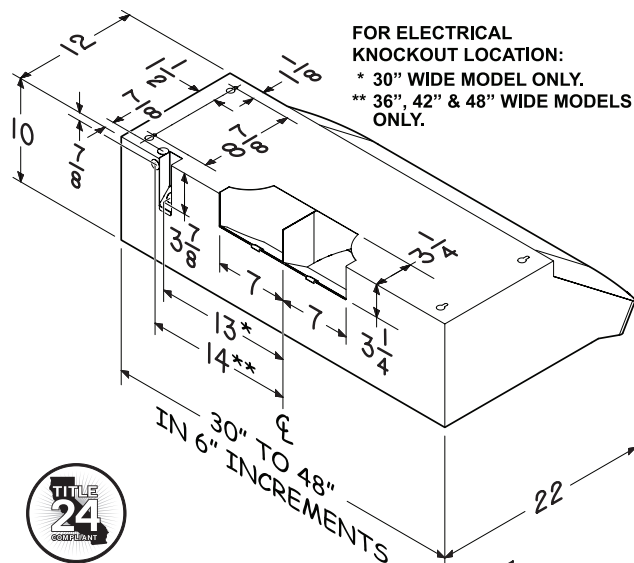

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

BEST Hartford, Wisconsin www.BestRangeHoods.com 800-558-1711
BEST Drummondville, QC Canada www.BestRangeHoods.com 866-737-7770

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted By Date

BEST UP27I HOOD SYSTEM

