


GAS RANGES PRODUCT DIMENSIONS

RGU-48, RGU-36, RGU-30 & RGUC-30

RGU-48




RGU-36




RGU-30
RGUC-30




Standard Installation:
using the appropriate range mount
Standard backguard model: BGRU-1248, BGRU-1236, or BGRU-1230

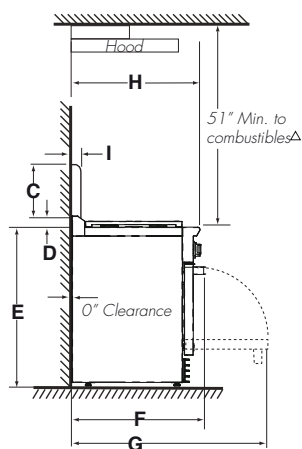

Full Backguard Installation:
using the appropriate wall mount Full
backguard model: BGRU-3048, BGRU-3036, or BGRU-3030

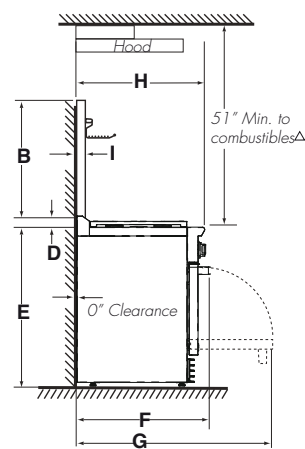

Island Installation:
using the integral island trim only

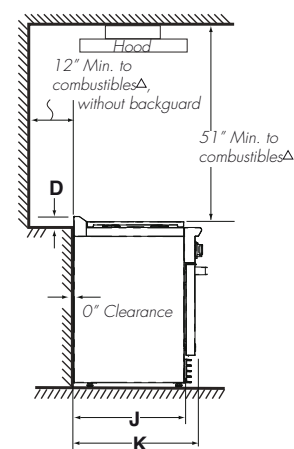

Δ As defined in the "National Fuel Gas Code" (ANSI Z223.1, latest edition).
The horizontal surfaces of the cooktop trim must not be below countertop level.



Important!
If using the island trim only, a 12" clearance is required between the back of the range and a combustible surface (above the cooking surface). If the clearance is less than 12", the back wall must be non-combustible and made of heat-resistant material.

PRODUCT DIMENSIONS (INCHES)

	RGU-48	RGU-36	RGU-30 RGUC-30
A Width of product	47 - 7/8"	35 - 7/8"	29 - 7/8"
B Height of full backguard	26 - 1/2"	26 - 1/2"	26 - 1/2"
C Height of standard backguard	8 - 1/2"	8 - 1/2"	8 - 1/2"
D Height of integral island trim	3 - 1/2"	3 - 1/2"	3 - 1/2"
E Height of product (from floor to cooktop trim, excluding grates and island trim)	min. 35 - 3/4" max. 36 - 3/4"	min. 35 - 3/4" max. 36 - 3/4"	min. 35 - 3/4" max. 36 - 3/4"
F Maximum depth from wall to front of product (including handle)	30 - 1/4"	30 - 1/4"	30 - 1/4"
G Maximum depth from wall to front of product with door open	46 - 11/16"	46 - 11/16"	46 - 11/16"
H Maximum depth from wall to front of product (excl. handle and knobs)	29"	29"	29"
I Depth of Backguard	1 - 5/16"	1 - 5/16"	1 - 5/16"
J Depth from wall to front of range side panel	25"	25"	25"
K Depth of product from wall to oven door front (excl. handle)	27 - 1/2"	27 - 1/2"	27 - 1/2"

GAS RANGES CABINETRY DIMENSIONS

RGU-48, RGU-36, RGU-30 & RGUC-30

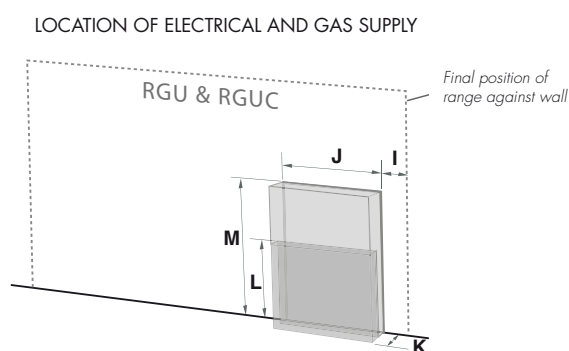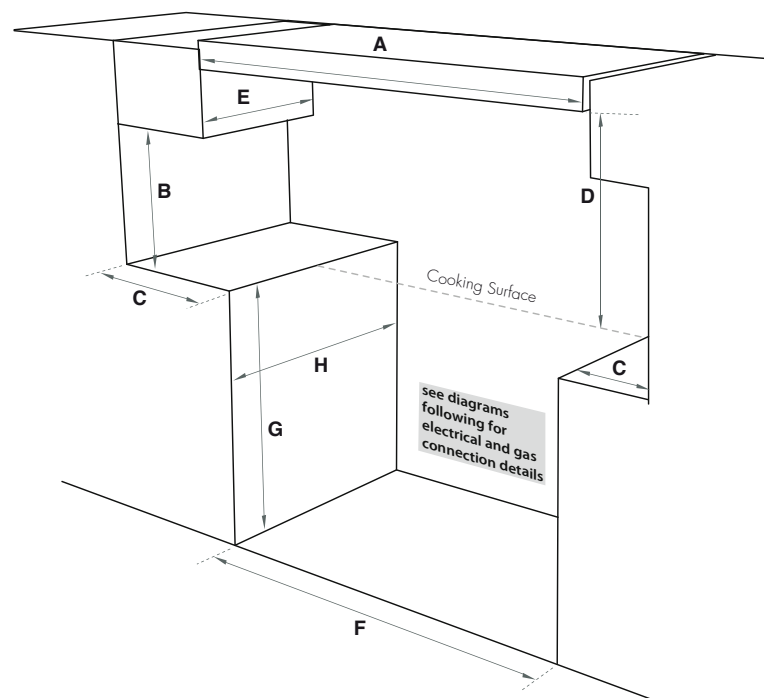

CABINETRY DIMENSIONS (INCHES)

	RGU-48	RGU-36	RGU-30	RGUC-30
A Minimum width of ventilation hood installed above range	48"	36"	30"	30"
B Minimum vertical distance between countertop and cabinet extending above counter	18"	18"	18"	18"
C Minimum clearance from left and right edge of range to nearest vertical combustible surface	12"	12"	12"	12"
D Minimum clearance from cooking surface to:				
- combustible surface centered above the cooking surface	51"	51"	51"	51"
- non-combustible surface centered above the cooking surface	30"	30"	30"	30"
E Maximum overall depth of overhead cabinetry	13"	13"	13"	13"
F Width of cabinetry opening	48"	36"	30"	30"
G Maximum height from floor to countertop:				
- with range levelling legs fully retracted	35 - 3/4"	35 - 3/4"	35 - 3/4"	35 - 3/4"
- with range levelling legs fully extended	36 - 3/4"	36 - 3/4"	36 - 3/4"	36 - 3/4"
H Maximum depth from wall to cabinet front	25"	25"	25"	25"
I Distance from right edge of range to supply area	1 - 1/2"	1 - 1/2"	1 - 1/2"	1 - 1/2"
J Width of supply areas	6"	6"	6"	9"
K Depth of supply areas (ie maximum protrusion of gas connection from wall)	2"	2"	2"	2"
L Height of gas supply area (from floor)	12"	12"	12"	4 - 1/2"
M Height of electrical supply area (from floor)	19"	19"	19"	11"

Product dimensions and specifications are listed as a guide only. For complete installation instructions and specifications, refer to the product Use & Care Guide/Installation Instructions available at www.dcsappliances.com