

JP328SK

GE 30" Built-In Electric Cooktop

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

IMPORTANT: Maintain 5" (12.7 cm) minimum vertical clearance between the cooktop bottom and any combustible surfaces. Clearance not required when installing wall oven underneath. Requires an 18" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.

Cooktop models JP328WK/328BK/328CK/328SK are approved for use over GE 27" or 30" Single Wall Ovens. Refer to cooktop and wall oven installation instructions packed with product for current dimensional data.


If installed with a **GE Telescopic Downdraft System**, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.

The countertop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered.

This cooktop **cannot** be installed in countertops that cannot accept screws, such as granite or marble, etc.



FILLER TRIM KIT: When replacing an old GE 30" cooktop (with larger opening) use the following one-piece trim kit to fill in the over-size hole. Available at additional cost. JXTR31W (White) JXTR31C (Bisque) JXTR31B (Black)

APPROXIMATE COOKING DIMENSIONS

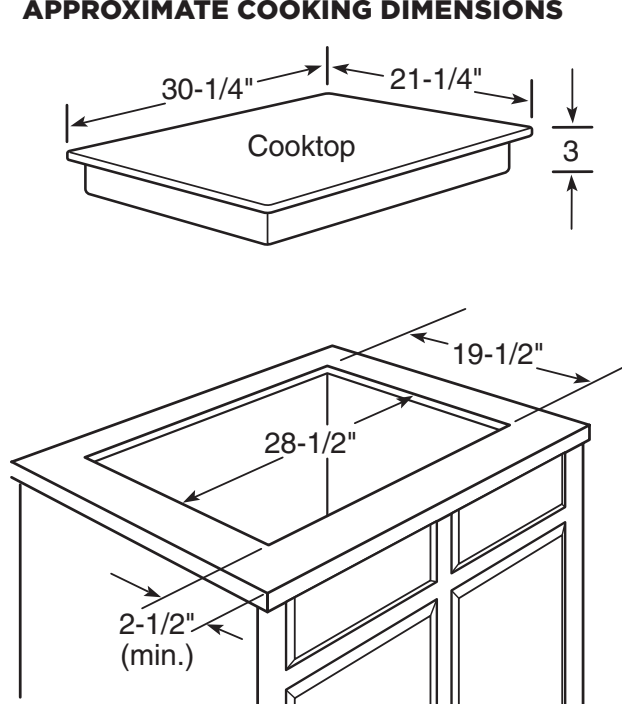

KW RATING	
240V	7.4
208V	5.6
AMPERAGE	
240V	40 Amps†
208V	30 Amps†

†**NOTE:** Check local codes for required breaker size.

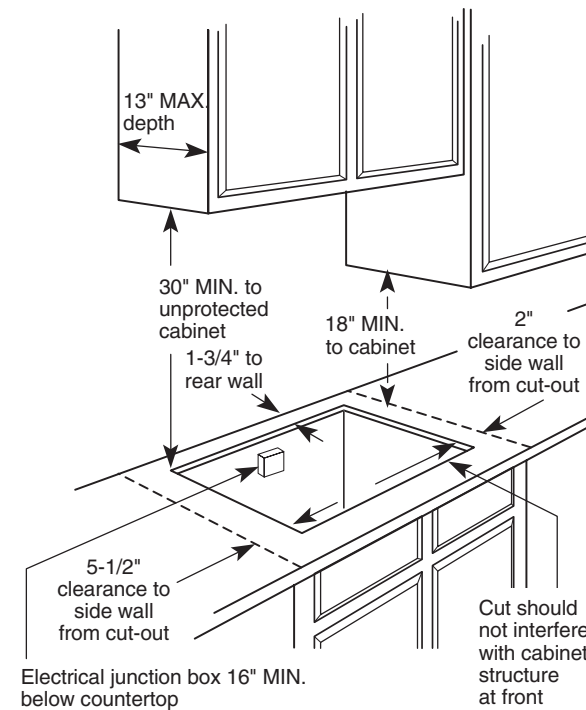

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 4/16

JP328SK

GE 30" Built-In Electric Cooktop

FEATURES AND BENEFITS

Coil heating elements - Provides consistent and even heat on the cooktop with a plug-in element that is removable for easy cleaning

Lift-up cooktop with support rod - Makes spills and messes under the cooktop easily accessible and within your reach

Upfront controls - Controls are placed within easy reach at the front center of the cooktop

Heating element "On" light - Illuminates when the cooking surface is activated

Model JP328SKSS - Stainless steel

GUARANTEED FIT

Replacing a similar cooktop from GE or another brand? GE cooktops are guaranteed for an exact fit to make replacement easy

Visit geappliances.com for more info

